



## Online open neuroimaging mass meta-analysis

Nielsen, Finn Årup; Kempton, Matthew J.; Williams, Steven C. R.

*Publication date:*  
2012

[Link back to DTU Orbit](#)

*Citation (APA):*

Nielsen, F. Å., Kempton, M. J., & Williams, S. C. R. (2012). *Online open neuroimaging mass meta-analysis*. Paper presented at Extended Semantic Web Conference (ESWC2012), Heraklion, Crete, Greece.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Online open neuroimaging mass meta-analysis

Finn Årup Nielsen<sup>1\*</sup>, Matthew J. Kempton<sup>2</sup>, and Steven C. R. Williams<sup>2</sup>

<sup>1</sup> DTU Informatics, Technical University of Denmark, Lyngby, Denmark.  
[fn@imm.dtu.dk](mailto:fn@imm.dtu.dk), <http://www.imm.dtu.dk/~fn/>

<sup>2</sup> Department of Neuroimaging, Institute of Psychiatry, King's College London,  
 London, UK

**Abstract.** We describe a system for meta-analysis where a wiki stores numerical data in a simple format and a web service performs the numerical computation. We initially apply the system on multiple meta-analyses of structural neuroimaging data results. The described system allows for mass meta-analysis, e.g., meta-analysis across multiple brain regions and multiple mental disorders.

## 1 Introduction

The scientific process aggregates a large number of scientific results into a common scientific consensus. *Meta-analysis* performs the aggregation by statistical analysis of numerical values presented across scientific papers. Collaborative systems such as wikis may easily aggregate text and values from multiple sources. However, so far they have had limited ability to apply numerical analysis as required, e.g., by meta-analysis.

Researchers have discussed the advantages and disadvantage of the tools for conducting systematic reviews from “paper and pencil”, over spreadsheets to RevMan and web-based specialized applications [10]: Setup cost, versatility, ability to manage data, etc. In 2009 they concluded that “no single data-extraction method is best for all systematic reviews in all circumstances”. For example, RevMan and Archie of the Cochrane Library provide an elaborate system for keeping track and analyzing textual and numerical data in meta-analyses, but the system could not import information from electronic databases [10]. Our original meta-analyses [4, 5] relied on the Microsoft Excel spreadsheets later distributed on public web sites. Compared to an ordinary spreadsheet a wiki solution provides data entry provenance and collaborative data entry with immediately update. Shareable folders on cloud-based storage systems would help collaboration on spreadsheets, but yield no provenance. Online services, such as the spreadsheet of Google Docs, may lack meta-analytic plotting facility. Web-based specialized applications for systematic reviews may have a high setup cost [10].

We have previously explored a simple online meta-analysis system—a “fielded wiki”—in connection with personality genetics [8]. As implemented specifically

---

\* Thanks to the Lundbeck Foundation for the funding of the *Center for Integrated Molecular Brain Imaging* (CIMBI).

for this scientific area the web service lacks generality for other types for meta-analytic data. Furthermore the system relied on PubMed or Brede Wiki to represent bibliographic information.

Following Ward Cunningham’s quote “What’s the simplest thing that could possibly work?” we present a simple system that allows for mass meta-analysis of numerical data presented as comma-separated values (CSV) in a standard MediaWiki-based wiki, — the Brede Wiki: <http://neuro.imm.dtu.dk/wiki/>.

## 2 Data and data representation

We use the MediaWiki-based Brede Wiki to represent the data [1]. For our neuroimaging data each data record usually consists of three values (number of subjects, their mean and standard deviation). The individual study typically compares two such data records, e.g., from a patient and a control group. We also record labels for the data record, e.g., the biographic information, as well as extra subject information about the two groups, such as age, gender and clinical characteristics, so that the total number of data items for each study may be seven or more. Each meta-analysis will usually determine what extra relevant information should be included and it may differ between studies, e.g., a *Y-BOCS* value has typically only relevance for obsessive-compulsive disorder patients. The functional neuroimaging area has *CogPO* and *Cognitive Atlas* ontologies enabling researchers to describe the topic of an experiment, but these efforts do not directly apply to our data. One CSV line carries the information for each study.

Separate wiki pages store—rather than uploaded files—the CSV data, so the MediaWiki template functionality can transclude the CSV data on other wiki pages. By convention pages with CSV information have the “.csv” extension as part of the title so external scripts can recognize them as special pages and the wiki pages have no wiki markup.

MediaWiki templates may generate links for download, editing and meta-analysis of the data. Presently, no controlled vocabulary beyond the template fields describes the columns in the CSV. To generate an appropriate content-type (text/csv) a bridging web script functions as a proxy, so a download of the CSV page can spawn a client-side spreadsheet program.

A few MediaWiki extensions can format CSV information: *SimpleTable* and *TableData*. Figure 1 shows the transclusion of CSV data with a modified version of the *SimpleTable* extension. The Brede Wiki uses the standard template

Study ID	Patient Group	Number of Subjects	Mean	Standard Deviation
Study 1	Control	15	0.12	0.05
Study 1	Depressed	15	0.18	0.06
Study 2	Control	20	0.10	0.04
Study 2	Depressed	20	0.15	0.05

**Fig. 1.** Screenshot from the wiki showing CSV data transcluded on a page.

system for recording structured bibliographic data about the publication and to annotate the CSV information, see Figure 2.

The bulk of the data currently presented in the wiki comes from the large mass meta-analysis of volumetric studies on major depressive disorder reporting over 50 separate meta-analyses for individual brain regions [4]. Further data comes from mass meta-analyses across multiple brain regions on bipolar disorder [5] and first-episode schizophrenia [6], a meta-analysis on longitudinal development in schizophrenia [7] as well as data from individual original studies on obsessive-compulsive disorder.

Apart from neuroimaging studies the Brede Wiki also records data from meta-analyses from a few other studies outside neuroimaging [2], allowing us to test the generality of the framework. The data is distributed under ODbL.

```

{{Metaanalysis csv begin}}
{{Metaanalysis csv
| title = Major Depressive Disorder Neuroimaging Database - Pituitary, total
| topic1 = Pituitary
| topic2 = Major depressive disorder
| topic3 = MaND
}}
{{Metaanalysis csv
| title = Obsessive-compulsive disorder Neuroimaging Database - Pituitary
| topic1 = Pituitary
| topic2 = Obsessive-compulsive disorder
| topic3 = ObND
}}
{{Metaanalysis csv end}}

```

**Fig. 2.** Template to annotate the CSV data and define the links to the meta-analysis.

### 3 Web script and meta-analysis

The web script for meta-analysis reads the CSV information, identifies the required columns for meta-analysis, performs the statistical computations and makes meta-analytic plots—the so-called forest and funnel plots—in the SVG format, see Figure 3. From either the title information or a PubMed identifier the script generates back-links from the generated page to pages on the wiki. The script may also export the computed results as JSON or CSV. Furthermore, it may generate a small *R* script that sets up the data in variables and use the *meta* library for meta-analysis.

The web script attempts to guess the separator used on the CSV page and also tries to match the elements of the column header, e.g., the strings “control n”, “controls number”, “number of controls”, etc. match for number of control subjects. With no matches the user needs to explicitly specify the relevant columns via URL parameters, which in turn a wiki template can setup.

Standard meta-analysis computes an *effect size* from each result in a paper and computes a combined meta-analytic effect size and its confidence interval. Although the methodological development continues, there exist established statistical analysis approaches for ordinary meta-analysis [2]. Our system implements computations on the standardized mean difference for continuous variables and on the natural logarithm of the odds ratio for categorical variables with fixed and random effects methods using an inverse-weighted variance model, — following the approach in the Stata program. As an extra option we provide meta-analysis on the natural logarithm of the variance ratio [3], for comparison of the standard deviations between two groups of subjects.

## 4 Results


We have added 124 pages with CSV data, — most of which contain data suitable for meta-analysis. For individual analyses the reading, computation and download finish within seconds. With multiple calls to the web script and JSON output another script can plot multiple meta-analytic results together as in Figure 4. Generating such a plot takes several minutes. For generating the page shown in Figure 3 we need only the CSV data and the web script, while the script that generated Figure 4 used information defined in templates, CSV data and the web script with no further adaption of MediaWiki.

Interpreted data and analysis


Study	Experimentals				Controls				Effects			
	Mean	SD	Events	N	Mean	SD	Events	N	SD <sub> pooled</sub>	Effect	SE	CI
MacMaster 2006	0.494000	0.130230	nan	10	0.542000	0.209860	nan	10	0.174644	-0.592	0.459	-1.492 0.308
MacMaster 2008	0.623300	0.179760	nan	21	0.877600	0.188480	nan	21	0.183227	-0.291	0.331	-0.899 0.318
Altmira 2009	691.000000	62.000000	nan	23	23.846.000000	73.000000	nan	23	67.723793	-0.249	0.384	-1.001 -1.498
Jung 2009	465.000000	55.800000	nan	12	543.000000	113.700000	nan	62	106.903927	-0.722	0.321	-1.352 -0.092
Jung 2009	577.800000	129.100000	nan	65	763.000000	113.700000	nan	62	113.519844	0.305	0.381	-0.452 0.941
Meta-analysis (fixed effects)			128				178			-0.316	0.127	-0.565 -0.067
Meta-analysis (random effects, DLS)										-0.685	0.428	-1.524 0.155

$I^2=0.896063$  (Q: 39.262526) df=4.0 (P-value: 0.000)

Forest plot



Funnel plot

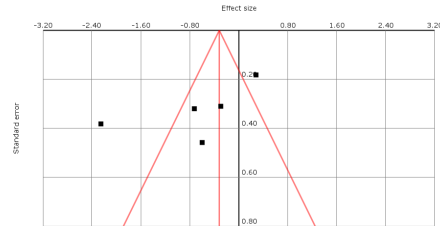

**Fig. 3.** Screenshot of web script showing the meta-analytic results with forest and funnel plots.


## 5 Discussion

By using MediaWiki in our present system we exploit the template facility to capture structured information, and free-form wikitext for annotation and comment on the individual scientific papers, — as in semantic academic annotation wikis *AcaWiki* and *WikiPapers*. It is also possible to use the pages of the wiki as a simple means to keep track of the status of the papers considered for the meta-analysis: potentially eligible, eligible, partially entered and fully entered.

Why not Semantic MediaWiki? Semantic MediaWiki (SMW) may query text and numerical data, though has not had the ability to make complex computations. The *Semantic Result Formats* extension includes average, sum, product and count result formats enabling simple computations of a series of numerical values, but insufficient for the kind of computations we require. The data for meta-analysis form a n-ary data record (mean, standard deviation, number of subjects, labels) so either individual SMW pages should store each data record or we should invoke the n-ary functionality in *Semantic Internal Objects* SMW extension, SMW *record* or the recently-introduced *subobject* SMW functionality. We have not investigated whether these tools provide convenient means for representing our data. The Brede Wiki can export its ontologies defined in MediaWiki template to SKOS. Our future research can consider RDFication of the CSV information through the SCOVO format [9].

We wrote the web service in Python, where Numpy makes vector computation available and Scipy provides statistical methods, necessary for the computation. In a future PHP implementation the script could more closely integrate with the wiki as either a MediaWiki or a SMW extension.

A wiki built from standard components provides an inexpensive solution with means to manage meta-analytic data in a collaborative environment. The general framework allows not only the meta-analysis of neuroimaging-derived data but has the potential for managing and analyzing data from many other domains.

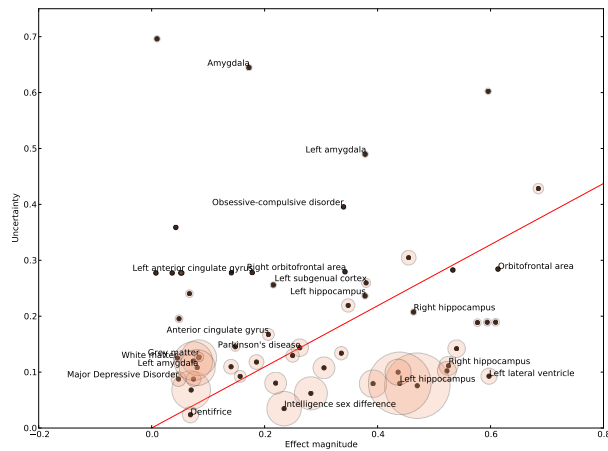

**Fig. 4.** Results from mass meta-analyses shown in a L'Abbé-like plot and constructed by calling the web script multiple times. Each dot corresponds to a meta-analysis. Uncertainty as a function of effect size with size of each dot determined by the number of subjects. The line indicates 0.05-significance.

## References

1. Nielsen, F.Å.: Brede Wiki: Neuroscience data structured in a wiki. *SemWiki* (2009) 129–133
2. Hartung, J. et al.: *Statistical Meta-Analysis with Applications*. (2008)
3. Shaffer, J.P.: Caution on the use of variance ratios: a comment. *Review of Educational Research* **62**(4) (1992) 429–432
4. Kempton, M.J. et al.: Structural neuroimaging studies in major depressive disorder: meta-analysis and comparison with bipolar disorder. *Archives of General Psychiatry* **68**(7) (2011) 675–690
5. Kempton, M.J. et al.: Meta-analysis, database, and meta-regression of 98 structural imaging studies in bipolar disorder. *Arch. Gen. Psychiatry* **65**(9) (2008) 1017–1032
6. Steen, R.G. et al.: Brain volume in first-episode schizophrenia: systematic review and meta-analysis of magnetic resonance imaging studies. *Brit. J. Psychiatry* **188** (2006) 510–518
7. Kempton, M.J. et al.: Progressive lateral ventricular enlargement in schizophrenia: a meta-analysis of longitudinal MRI studies. *Schiz. Res.* **120**(1–3) (2010) 54–52
8. Nielsen, F.Å.: A fielded wiki for personality genetics. *WikiSym* (2010)
9. Hausenblas, M. et al.: SCOVO: Using statistics on the web of data. *ESWC* (2009) 708–722
10. Elamin, M.B. et al.: Choice of data extraction tools for systematic reviews depends on resources and review complexity. *J. Clin. Epidemiology* **62**(5) (2009) 506–510